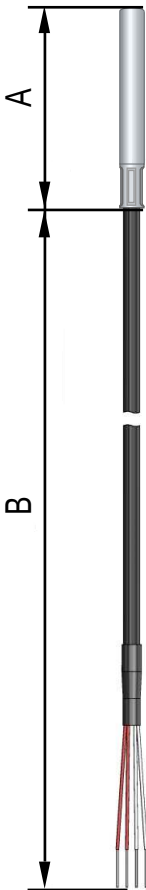


Immersion resistance temperature probe

Techical Features			Type ZRC 100
Resistance Temperature Probe	Resistance Temperature Probe	Norm	
	PT100	IEC 751	
	PT1000	IEC 751	
Comp.Cnt.	1 or 2		
Tolerance	Class B	DIN IEC 751	
	Class A	DIN IEC 751	
	Class 1/3B	DIN IEC 751	
	Class 1/10B	DIN IEC 751	
Temperature Range	-200~300° C		
	-50~400° C (Standard)		
	-50~600° C		
	-200~600° C		
Sensor	Two wire		
	Three wire (Standard)		
	Four wire		
Insulation material	MgO/ Heat conducting sealant		
Sheath meterial	304 / 1.4301		
	316L / 1.4404		
Sheath diameter	3.0mm 4.0mm 5.0 mm		
	6.0mm 8.0mm 9.0 mm		
	Other diameter on request		
Probe lenth	Please specify		
Cable material	PVC		
	Silicone (Shield can be select,please specify)		
	PTFE / FEP (Shield can be select,please specify)		
	Metal braiding		
	Heat resistant cable (600 ° C)		
Cable length	Cable specially for vehicle		
	Please specify		
	Bare (Standard)		
Temination	Ferrules		
	Receptacle		
	Miniature plug		
	Standard plug		
	Air plug		
Accessories	Waterproof jacket		
	Cable protector:coil		
	Adjustable thread join(see attached list 1)		