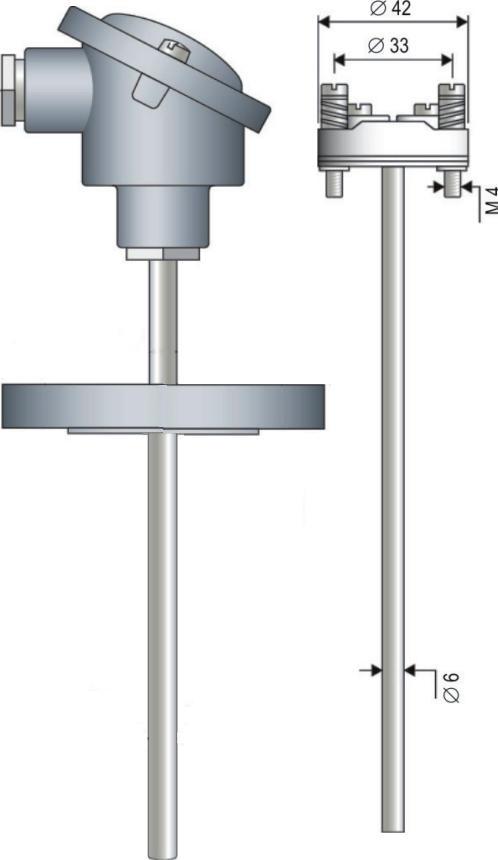


with terminal head B and flange

Technical features					TYPE: ZTB 560	
Thermocouple	Thermocouple	Plus	Minus	Norm		
	Type K	NiCr	NiAl	IEC 584		
	Type J	Fe	CuNi	IEC 584		
	Type L	Fe	CuNi	DIN 43710		
	Type T	Cu	CuNi	IEC 584		
	Type N	NiCrSi	NiSi	IEC 584		
	Type E	NiCr	CuNi	ICE 584		
Sensor	1 or 2					
Accuracy	Class 1 DIN IEC 584					
Insulation material	MgO					
Sheath material	304 / 1.4301					
	316L / 1.4404					
	Inconel600					
	Titanium					
	Hastelloy					
	Wear-resistant steel					
	PTFE					
Sheath diameter	Diamond spar					
	6.0 mm	8.0 mm	9.0mm	11.0 mm	16.0 mm	
	Other diameter on request					
Probe length	Please spicify					
Probe form	Straight bar (standard)					
	With holes					
	Reducing					
Electrical connection	M20*1.5					
Output	Thermocouple output(standard)					
	4~20mA					
	4~20mA (HART agreement)					
	0~10V					
	0~10V (HART agreement)					
Flange specification	Other output on request					
	Dimension on request(see attached list 3)					