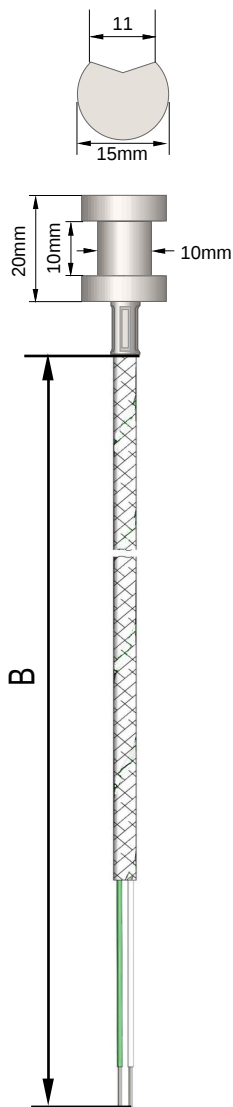


Surface resistance temperature probe for pipes

Techical Features			Type ZRL 100
Resistance Temperature Probe	Resistance Temperature Probe	Norm	
	PT100	IEC 751	
	PT1000	IEC 751	
Comp.Cnt.	1 or 2		
Tolerance	Class B	DIN IEC 751	
	Class A	DIN IEC 751	
	Class 1/3B	DIN IEC 751	
	Class 1/10B	DIN IEC 751	
Temperature Range	-200~300° C		
	-50~400° C (Standard)		
	-50~600° C		
	-200~600° C		
Sensor	Two wire		
	Three wire (Standard)		
	Four wire		
Insulation material	Heat conducting sealant/ MgO		
Sheath meterial	304 / 1.4301		
	Aluminum		
Cable material	PVC		
	Silicone (Shield can be select,please specify)		
	PTFE / FEP (Shield can be select,please specify)		
	Metal braiding		
	Heat resistant cable		
Cable length	Cable specially for vehicle		
	Please specify		
	Bare (Standard)		
Temination	Ferrules		
	Receptacle		
	Miniature plug		
	Standard plug		
	Air plug		
Fixed type	Curb chain		
	Lathedog		
Accessories	Cable protector:tube		
	Cable protector:coil		