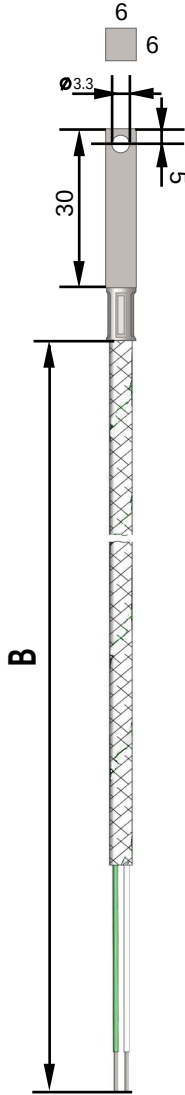


Surface mounting resistance temperature probe

Techical Features			Type ZRL 100-02
Resistance Temperature Probe	Resistance Temperature Probe	Norm	
	PT100	IEC 751	
	PT1000	IEC 751	
Comp.Cnt.	1 or 2		
Tolerance	Class B	DIN IEC 751	
	Class A	DIN IEC 751	
	Class 1/3B	DIN IEC 751	
	Class 1/10B	DIN IEC 751	
Temperature Range	-200~300° C		
	-50~400° C (Standard)		
	-50~600° C		
	-200~600° C		
Sensor	Two wire		
	Three wire (Standard)		
	Four wire		
Insulation material	Heat conducting sealant/ MgO		
Sheath materail	304 / 1.4301		
	Aluminum		
Cable material	PVC		
	Silicone (Shield can be select,please specify)		
	PTFE/FEP (Shield can be select,please specify)		
	Metal braiding		
	Heat resistant cable (600 ° C)		
Cable length	Cable specially for vehicle		
	Please specify		
	Bare (Standard)		
Temination	Ferrules		
	Receptacle		
	Miniature plug		
	Standard plug		
	air plug		
Fixed type	With fixed screw fitting		
Accessories	Cable protector:tube		
	Cable protector:coil		