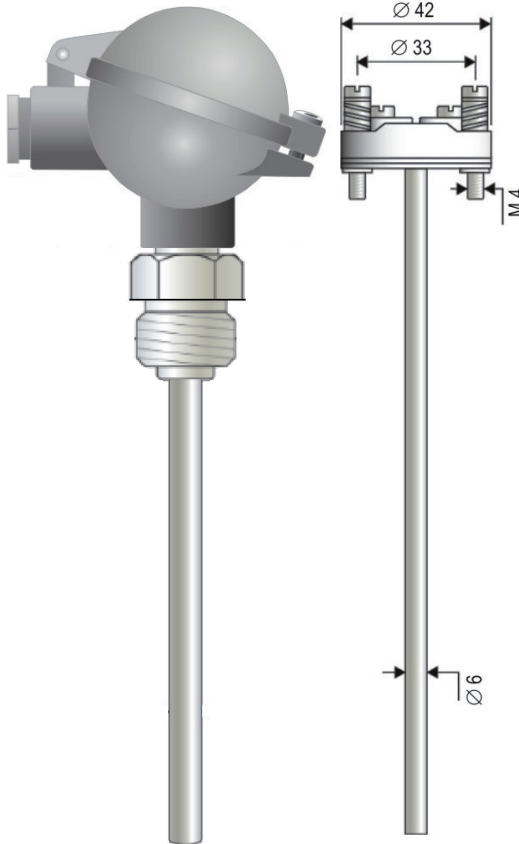


with terminal head BUZ and fixed screw

Technical features					TYPE: ZTB 710		
Thermocouple	Thermocouple	Plus	Minus	Norm			
	Type K	NiCr	NiAl	IEC 584			
	Type J	Fe	CuNi	IEC 584			
	Type L	Fe	CuNi	DIN 43710			
	Type T	Cu	CuNi	IEC 584			
	Type N	NiCrSi	NiSi	IEC 584			
	Type E	NiCr	CuNi	ICE 584			
Sensor	1 or 2						
Accuracy	Class 1 DIN IEC 584						
Insulation material	MgO						
Sheath material	304 / 1.4301						
	316L / 1.4404						
	Inconel600						
	Titanium						
	Hastelloy						
	Wear-resistant steel						
	PTFE						
Sheath diameter	Diamond spar						
	6.0 mm	8.0 mm	9.0mm	11.0 mm			16.0 mm
	Other diameter on request						
Probe length	Please spicify						
Probe form	Straight bar (standard)						
	With holes						
	Reducing						
Electrical connection	M20*1.5						
Output	Thermocouple output(standard)						
	4~20mA						
	4~20mA (HART agreement)						
	0~10V						
	0~10V (HART agreement)						
Thread specification	Other output on request						
Accessories	Dimension on request(see attached list 1)						
	Sheath(see attached list 2)						