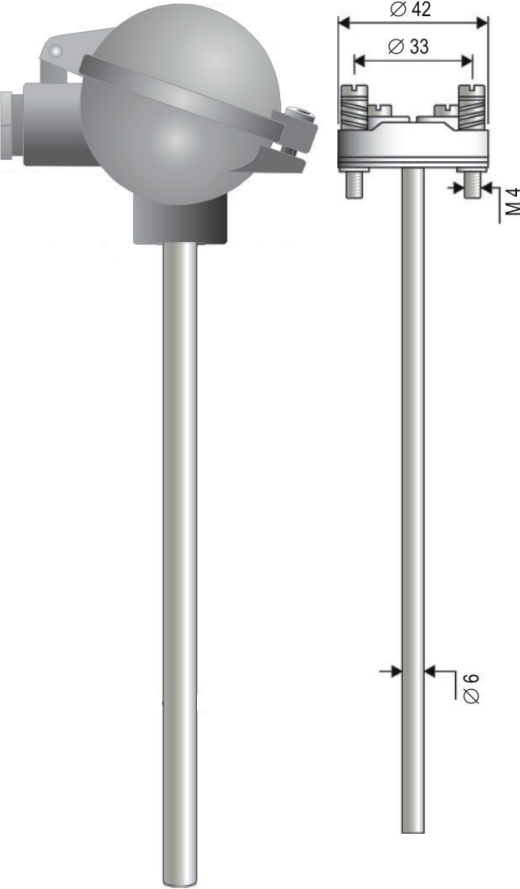


with terminal head BUZ

TYPE: ZTB 700		Technical features			
	Thermocouple	Thermocouple	Plus	Minus	Norm
		Type K	NiCr	NiAl	IEC 584
		Type J	Fe	CuNi	IEC 584
		Type L	Fe	CuNi	DIN 43710
		Type T	Cu	CuNi	IEC 584
		Type N	NiCrSi	NiSi	IEC 584
		Type E	NiCr	CuNi	ICE 584
	Sensor	1 or 2			
	Accuracy	Class 1 DIN IEC 584			
	Insulation material	MgO			
	Sheath material	304 / 1.4301			
		316L / 1.4404			
		Inconel600			
		Titanium			
		Hastelloy			
		Wear-resistant steel			
	Sheath diameter	PTFE			
		Diamond spar			
	Probe length	6.0 mm 8.0 mm 9.0mm 11.0 mm 16.0 mm			
	Probe form	Other diameter on request			
	Electrical connection	Please spicify			
		Straight bar(standard)			
	Output	With holes			
		Reducing			
		M20*1.5			
		Thermocouple output(standard)			
	Accessories	4~20mA			
		4~20mA (HART agreement)			
		0~10V			
		0~10V (HART agreement)			
		Other output on request			
		Adjustable thread join(see attached list 1)			
		Flexible flangedimension on request(see attached list 3)			