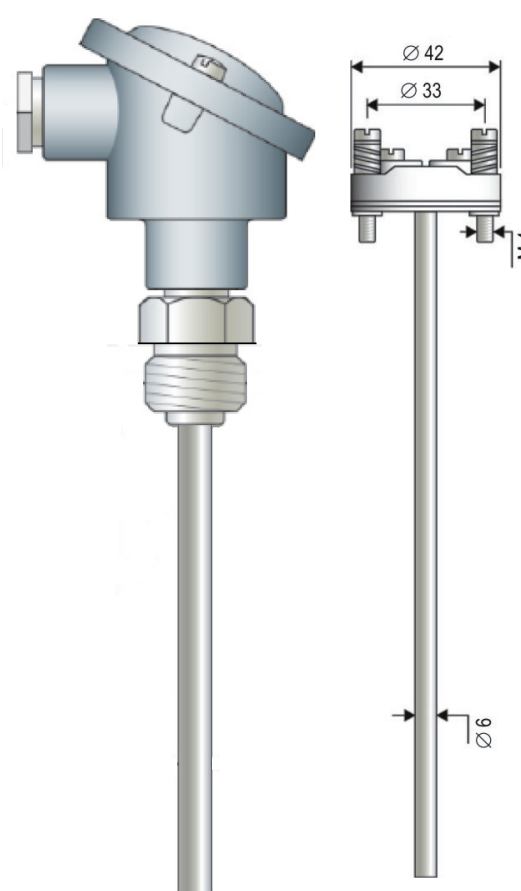


with terminal head B and fixed screw

Technical features					TYPE: ZTB 510	
Thermocouple	Thermocouple	Plus	Minus	Norm		
	Type K	NiCr	NiAl	IEC 584		
	Type J	Fe	CuNi	IEC 584		
	Type L	Fe	CuNi	DIN 43710		
	Type T	Cu	CuNi	IEC 584		
	Type N	NiCrSi	NiSi	IEC 584		
	Type E	NiCr	CuNi	ICE 584		
Sensor	1or2					
Tolerance	Class 1	DIN IEC 584				
Insulation material	MgO					
Sheath material	304 / 1.4301					
	316L / 1.4404					
	Inconel600					
	Titanium					
	Hastelloy					
	Wear-resistant steel					
	PTFE					
Sheath diameter	Diamond spar					
	6.0 mm	8.0 mm	9.0mm	11.0 mm	16.0 mm	
Probe length	Other diameter on request					
Probe form	Please specify					
	Straight bar (standard)					
	With holes					
Electrical connection	Reducing					
	M20*1.5					
	Thermocouple output(standard)					
Signal output	4~20mA					
	4~20mA (HART agreement)					
	0~10V					
	0~10V (HART agreement)					
	Other output on request					
Thread specification	Dimension on request(see attached list 1)					
Accessories	Sheath(see attached list 2)					