


with terminal head BUZH

TYPE: ZTB 800

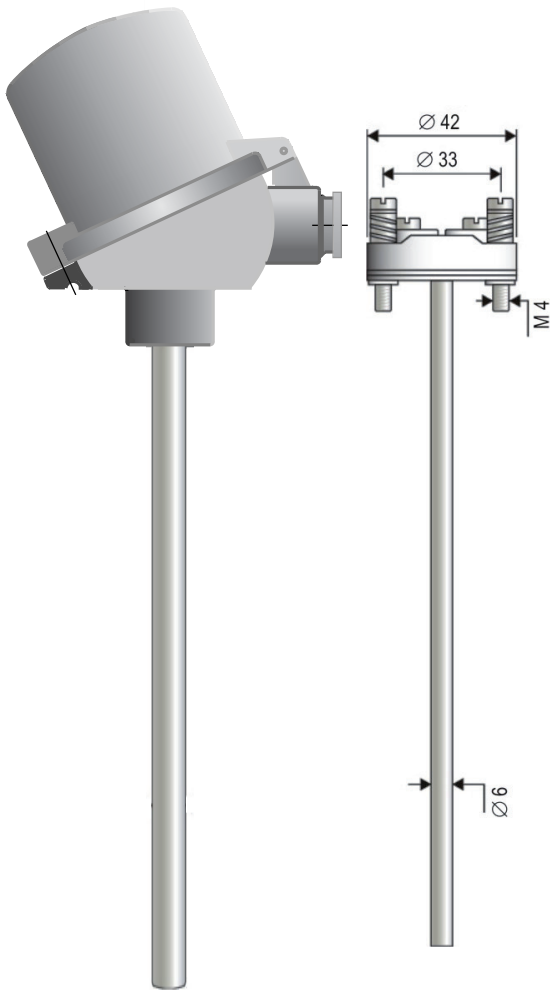

Technical features				
Thermocouple	Thermocouple	Plus	Minus	Norm
	Type K	NiCr	NiAl	IEC 584
	Type J	Fe	CuNi	IEC 584
	Type L	Fe	CuNi	DIN 43710
	Type T	Cu	CuNi	IEC 584
	Type N	NiCrSi	NiSi	IEC 584
	Type E	NiCr	CuNi	ICE 584
Sensor	2			
Accuracy	Class 1 DIN IEC 584			
Insulation material	MgO			
Sheath material	304 / 1.4301			
	316L / 1.4404			
	Inconel600			
	Titanium			
	Hastelloy			
	Wear-resistant steel			
	PTFE			
Sheath diameter	Diamond spar			
	6.0 mm	8.0 mm	9.0mm	11.0 mm 16.0 mm
Probe length	Other diameter on request			
Probe form	Please spicify			
	Straight bar (standard)			
	With holes			
Electrical connection	Reducing			
	M20*1.5			
Output	Thermocouple output(standard)			
	4~20mA			
	4~20mA (HART agreement)			
	0~10V			
	0~10V (HART agreement)			
Accessories	Other output on request			
	Adjustable thread join(see attached list 1)			
	Flexible flange(see attached list 3)			