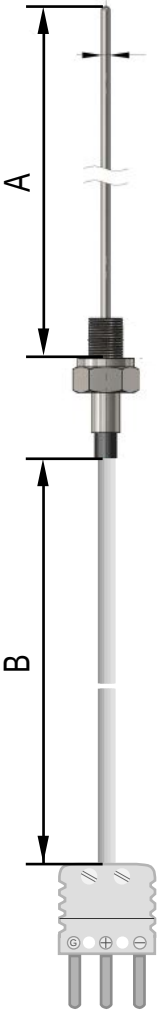


Mineral-insulated Resistance Temperature Probe
with Cable ,Miniature plug,Fixed thread

Type: MRC 210		Techical Features		
	Resistance	Resistance Temperature Probe		Norm
	Temperature Probe	PT100		IEC 751
		PT1000		IEC 751
	Comp.Cnt.	1 or 2		
	Tolerance	Class B		DIN IEC 751
		Class A		DIN IEC 751
		Class 1/3B		DIN IEC 751
		Class 1/10B		DIN IEC 751
	Temperature Range	-200~300° C		
		-50~400° C (Standard)		
		-50~600° C		
		-200~600° C		
	Sensor	Two Wire		
		Three Wire (Standard)		
		Four Wire		
	Insulation Material	MgO		
	Sheath Material	304 / 1.4301		
		316L / 1.4404		
		310S / 1.4845		
	Sheath Diameter	Inconel600		
		1.5mm	2.0mm	3.0 mm
		4.0mm	5.0mm	6.0 mm
	Bending Radius	Ohter Diameter on Request		
		Minimus 5X the external Diameter		
	Probe Length	Please Specify		
	Cable Material	PVC		
		Silicone		
		PTFE / FEP		
	Cable Length	Mental Braiding		
		Shield can be select,Please specify		
	Thread Specification	Please Specify		
	Accessories	Adjustable thread join(see attached list 1)		
		Cable Protector:Coil		

Nicromil Highly resistant to general corrosion and stress-corrosion cracking can be operated up to 1250° C.