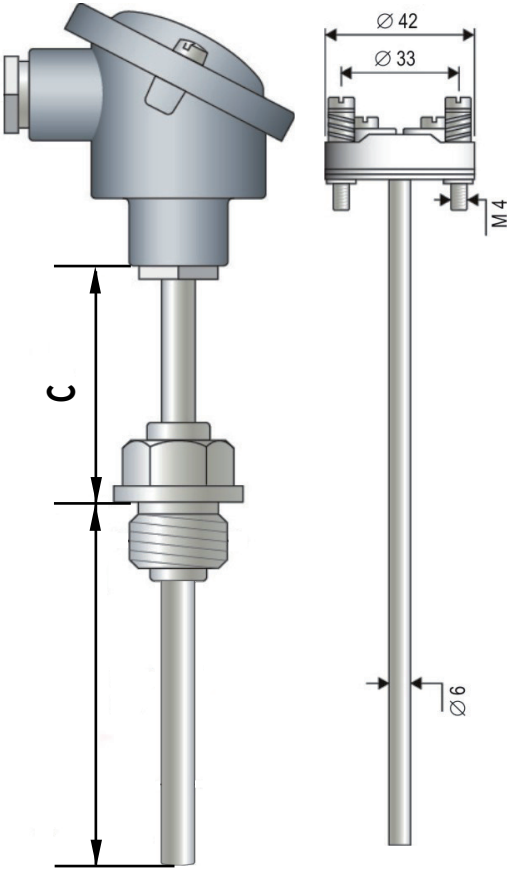


Thermocouple with connection head B fixed thread,extension tube

TYPE: ZTB 520		Technical features			
		Thermocouple	Plus	Minus	Norm
		Type K	NiCr	NiAl	IEC 584
		Type J	Fe	CuNi	IEC 584
		Type L	Fe	CuNi	DIN 43710
		Type T	Cu	CuNi	IEC 584
		Type N	NiCrSi	NiSi	IEC 584
		Type E	NiCr	CuNi	ICE 584
		Sensor	1 or 2		
		Accuracy	Class 1 DIN IEC 584		
		Insulation material	MgO		
		Sheath material	304 / 1.4301		
			316L / 1.4404		
			Inconel600		
			Titanium		
			Hastelloy		
			Wear-resistant steel		
			PTFE		
		Sheath diameter	Diamond spar		
			6.0 mm 8.0 mm 9.0mm 11.0 mm 16.0 mm		
		Probe length	Other diameter on request		
		Probe form	Please spicify		
			Straight bar (standard)		
			With holes		
		Electrical connection	Reducing		
			M20*1.5		
		Output	Thermocouple output(standard)		
			4~20mA		
			4~20mA (HARTagreement		
			0~10V		
			0~10V (HARTagreement)		
Support colum(C)			Other output on request		
			50mm		
			70mm standard		
Thread specification			130mm		
			Other length on request		
Accessories			Dimension on request(see attached list 1)		
			Sheath(see attached list 2)		